



(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**23.03.2005 Bulletin 2005/12**

(51) Int Cl.7: **H01Q 21/24, H01Q 23/00,**  
**H01Q 1/38**

(21) Application number: **98106924.8**

(22) Date of filing: **16.04.1998**

(54) **Circular-polarization antenna**

Antenne mit zirkularer Polarization

Antenne à polarisation circulaire

(84) Designated Contracting States:  
**DE FR GB IT SE**

(30) Priority: **18.04.1997 JP 10165897**  
**19.12.1997 JP 35044497**  
**27.02.1998 JP 4733298**

(43) Date of publication of application:  
**21.10.1998 Bulletin 1998/43**

(73) Proprietor: **MURATA MANUFACTURING CO., LTD.**  
**Nagaokakyo-shi Kyoto-fu (JP)**

(72) Inventors:  
• **Kushihi, Yuichi,**  
**c/o Murata Manufacturing Co., Ltd**  
**Nagaokakyo-shi, Kyoto-fu (JP)**

• **Shikata, Masaru,**  
**c/o Murata Manufacturing Co., Ltd**  
**Nagaokakyo-shi, Kyoto-fu (JP)**

(74) Representative: **Schoppe, Fritz, Dipl.-Ing.**  
**Schoppe, Zimmermann, Stöckeler & Zinkler**  
**Patentanwälte**  
**Postfach 246**  
**82043 Pullach bei München (DE)**

(56) References cited:  
**EP-A- 0 346 125** **EP-A- 0 746 054**  
**EP-A- 0 766 340** **EP-A- 0 767 511**  
**GB-A- 2 238 665** **GB-A- 2 297 650**  
**US-A- 5 377 081**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

### BACKGROUND OF THE INVENTION

#### 1. Field of the Invention

**[0001]** The present invention relates to circular-polarization antennas, and more particularly, to a compact low-profile circular-polarization antenna such as a GPS antenna used for car-mounted and portable navigation systems. The present invention further relates to a radio apparatus using the circular-polarization antenna.

#### 2. Related Art of the Invention

**[0002]** Fig. 17 shows a conventional circular-polarization antenna. The circular-polarization antenna is of a microstrip patch type.

**[0003]** In Fig. 17, the circular-polarization antenna 100 includes a mounting substrate 101, a patch antenna 102 mounted on the second major surface of the mounting substrate 101, a shield case 103 for covering an amplification circuit (not shown) mounted on the first major surface of the mounting substrate 101, and a cable 104 connected to the amplification circuit at one end. The patch antenna 102 is made from a dielectric substrate such as ceramic and resin. A ground electrode is formed on the whole first major surface of the patch antenna 102 and a substantially square emission electrode 102a is formed on the second major surface. About between the center of the emission electrode 102a and one corner, a through hole 102b passing through the dielectric substrate and the mounting substrate 101 and being connected to the amplification circuit mounted on the first major surface of the mounting substrate 101 is formed.

**[0004]** Figs. 18(a) and 18(b) show another conventional circular-polarization antenna. It is also of a microstrip patch type. The same symbols as those used in Fig. 17 are assigned to the patch antenna. Fig. 18(a) is a perspective view of the circular-polarization antenna when viewed from the second major surface of a mounting substrate and Fig. 18(b) is a perspective view of the circular-polarization antenna when viewed from first major surface of the mounting substrate.

**[0005]** In Fig. 18, the circular-polarization antenna 110 includes a mounting substrate 111, a patch antenna 102 mounted on the second major surface of the mounting substrate 111, a shield case 112 for covering an amplification circuit mounted on the second major surface of the mounting substrate 111, a connection electrode 113 for connecting the patch antenna 102 to the amplification circuit through the first major surface of the mounting substrate 111, a shield case 114 for covering the connection electrode 113 at the first major surface of the mounting substrate 111, and a cable 115 connected to the amplification circuit at one end.

**[0006]** Since the patch antenna 102 has a microstrip

structure, a ground electrode is formed substantially on the whole mounting surface thereof. To connect the patch antenna 102 to the amplification circuit, it is necessary to route through the first major surface of the mounting substrate 111. The shield case 114 is provided in order to protect the connection electrode 113 and to suppress unwanted emission.

**[0007]** In the conventional circular-polarization antenna 100 shown in Fig. 17, since the ground electrode is formed on the whole mounting surface of the dielectric substrate constituting the patch antenna 102, it is necessary to provide the amplification circuit and the shield case 103 at the first major surface of the mounting substrate 101. Therefore, the circular-polarization antenna has a high profile as a whole. In addition, since components are required to be mounted on both surfaces of the mounting substrate 101, mounting cost is high.

**[0008]** On the other hand, in the conventional circular-polarization antenna 110 shown in Fig. 18, the amplification circuit and the shield case 112 are mounted on the same plane of the mounting substrate 111 as the patch antenna 102. Also in this case, to form the connection electrode 113 for connecting the amplification circuit to the patch antenna 102 on the first major surface of the mounting substrate 111, it is required to provide the shield case 114 for covering the connection electrode 113 on the first major surface of the mounting substrate 111. Therefore, it is difficult to reduce the height of the circular-polarization antenna as a whole and mounting cost is unlikely to be reduced.

**[0009]** In the conventional case shown in Fig. 18, a multilayer substrate may be used for the mounting substrate and the connection electrode could be formed on an inner layer of the mounting substrate. In this case, however, the mounting substrate costs increase even further.

**[0010]** EP 0 767 511 A2 discloses an antenna system, comprising a plurality of independently-constructed and operated antenna units, upon which are mounted a plurality of transmit and receive antenna pairs. This provides a means for the antenna system to be arranged to provide substantially hemispherical radio coverage. By adjusting the phase of each version of a radio signal to be transmitted or received, the signal may be formed into a beam, according to the known technique of directional beam forming, providing an antenna system with directional gain. It is a disadvantage of the disclosed antenna system that the transmitter and receiver circuits and the antenna pairs are mounted on opposite surfaces of a mounting substrate, which results in high production costs for such an antenna system.

**[0011]** It is the object of the present invention to provide a low-cost, low-profile circular-polarization antenna.

**[0012]** This object is achieved by a circular-polarization antenna according to claim 1.

**[0013]** According to one aspect, the present invention provides a radio apparatus having a low mounting cost.

**[0014]** The present invention provides a circular-polarization antenna, comprising: a mounting substrate; a pair of linear-polarization surface-mount antennas mounted on said mounting substrate disposed such that their planes of polarization in the direction normal to the mounting surface of said mounting substrate are substantially perpendicular to each other; a phase circuit connected to said pair of linear-polarization surface-mount antennas for sending thereto or receiving therefrom signals having the same amplitude and a phase difference of 90 degrees to each other; an amplification circuit connected to said phase circuit; a shield case covering said amplification circuit; and said pair of linear-polarization surface-mount antennas, said phase circuit, said amplification circuit and said shield case being mounted on the same mounting surface of said mounting substrate.

**[0015]** According to the above described circular-polarization antenna, a low profile antenna is implemented and the mounting cost of components is reduced.

**[0016]** The above circular-polarization antenna may further comprise a radome covering said surface-mount antennas, said phase circuit, said shield case and said mounting substrate.

**[0017]** In the above circular-polarization antenna, each of the surface-mount antennas may have at least a power-feeding electrode, an emission electrode, and a ground electrode provided on the surface or both on the surface and in the inside of a substantially parallelepiped-rectangular base member made of at least one of a dielectric material and a magnetic material.

**[0018]** In the above circular-polarization antenna, each of said surface-mount antennas may be formed such that said ground electrode is provided substantially on a first major surface of said base member, said emission electrode may be formed substantially on a second major surface of the base member with one end serving as an open end and the other end serving as a ground end connected to said ground electrode, and one end of said power-feeding electrode may be formed in the vicinity of the open end of said emission electrode.

**[0019]** In the above circular-polarization antenna, the other end of said emission electrode of each of the surface-mount antennas may be divided into a plurality of ends, and the ends are connected to the ground electrode through different end faces of said base member and serve as ground ends. In the above circular-polarization antenna, said pair of surface-mount antennas may be disposed such that their ground ends are farthest away from each other.

**[0020]** In the above circular-polarization antenna, the open end of said emission electrode in each of said surface-mount antennas may be formed inward from the end of the second major surface of said base member at a predetermined distance on the second major surface of the base member.

**[0021]** The above described circular-polarization antenna may further comprise a shield plate provided be-

tween said pair of surface-mount antennas.

**[0022]** By disposing the two surface-mount antennas such that the distance between the ground ends of the emission electrodes are longest, by forming the open ends of the emission electrodes in the two surface-mount antennas so as to be away from the ends of the second major surfaces of the base members by a certain distance, or by providing a shield plate between the two surface-mount antennas at a portion where the antennas are close to each other, the mutual interference between the two surface-mount antennas is reduced and a low-profile circular-polarization antenna is made with a low-profile radome.

**[0023]** In the above circular-polarization antenna, said phase circuit may comprise at least one of a capacitive element and an inductive element connected to said pair of surface-mount antennas.

**[0024]** The present invention further provides a radio apparatus, comprising: the above described circular-polarization antenna; a receiving section and a signal-processing section connected in series to said circular-polarization antenna.

**[0025]** The present invention further provides a use of the above described circular-polarization antenna for a radio apparatus.

**[0026]** According to the radio apparatus of the present invention, miniaturization, cost reduction and lowering cost of set up the radio apparatus itself can be achieved by using the circular-polarization antenna of the present invention.

## BRIEF DESCRIPTION OF THE DRAWINGS

### **[0027]**

- Fig. 1 is a perspective view of a circular-polarization antenna according to an embodiment of the present invention.
- Fig. 2 is a full perspective view showing the structure of a surface-mount antenna used in the embodiment shown in Fig. 1.
- Fig. 3 is a full perspective view showing the structure of another surface-mount antenna used in a circular-polarization antenna according to the present invention.
- Fig. 4 is a side view showing currents flowing into a ground end in a case when the surface-mount antenna shown in Fig. 3 has only the ground end.
- Fig. 5 is a cross section showing an electric field generated from the emission electrode of a surface-mount antenna constituting the linear-polarization antenna shown in Fig. 1.

- Fig. 6 is a perspective view of a circular-polarization antenna according to another embodiment of the present invention.
- Fig. 7 is a cross section showing an electric field generated from the emission electrode of a surface-mount antenna constituting the linear-polarization antenna shown in Fig. 6.
- Fig. 8 is a perspective view of a circular-polarization antenna according to still another embodiment of the present invention.
- Fig. 9 is a full perspective view showing the structure of still another surface-mount antenna used in a circular-polarization antenna according to the present invention.
- Fig. 10 is a full perspective view showing the structure of yet another surface-mount antenna used in a circular-polarization antenna according to the present invention.
- Fig. 11 is a perspective view of a circular-polarization antenna according to yet another embodiment of the present invention.
- Fig. 12 is a perspective view of a circular-polarization antenna according to a further embodiment of the present invention.
- Fig. 13 is a perspective view of a circular-polarization antenna according to a still a further another embodiment of the present invention.
- Fig. 14 is a perspective view of a circular-polarization antenna according to a yet further embodiment of the present invention.
- Fig. 15 is a perspective view of a circular-polarization antenna according to a yet still further embodiment of the present invention.
- Fig. 16 is a block diagram showing an embodiment of a radio apparatus of the present invention.
- Fig. 17 is a perspective view of a conventional circular-polarization antenna.
- Fig. 18(A) and Fig. 18(b) are perspective views of another conventional circular-polarization antenna. Fig. 18(a) is a view seen from the second major surface of a mounting substrate, and Fig. 18(b) is a view seen from the first major surface.

[0028] Other features and advantages of the present invention will become apparent from the following description of the invention which refers to the accompanying drawings.

#### PREFERRED EMBODIMENTS OF THE PRESENT INVENTION

[0029] Fig. 1 is a circular-polarization antenna according to an embodiment of the present invention. In Fig. 1, the circular-polarization antenna 1 includes a mounting substrate 2, surface-mount antennas 3 and 4 mounted on the second major surface of the mounting substrate 2, a shield case 5 for covering an amplification circuit (not shown) mounted on the second major surface of the mounting substrate 2, a phase circuit 6 for connecting the amplification circuit to the surface-mount antennas 3 and 4, and a cable 7 connected to the amplification circuit at one end. There is nothing mounted on the first major surface of the mounting substrate 2. The surface-mount antennas 3 and 4 have the same structure and, as described later, are disposed such that their longitudinal directions are perpendicular to each other in order that their planes of polarization are perpendicular to each other in the direction normal to the mounting surface of the mounting substrate 2. The phase circuit 6 is formed of a microstrip line and one end thereof is divided to a microstrip line 6a and a microstrip line 6b, which are connected to the surface-mount antennas 3 and 4, respectively. The microstrip lines 6a and 6b are capacitive and inductive, and function as a capacitive element and an inductive element. The lengths and the widths of the microstrip lines 6a and 6b are determined such that the absolute values of the impedances thereof match those of the output impedances of the surface-mount antennas 3 and 4. Specifically, the microstrip line 6b is set longer than the microstrip line 6a.

[0030] Fig. 2 shows the structure of the surface-mount antennas 3 and 4 used in the embodiment shown in Fig. 1. In Fig. 2, the surface-mount antenna 3 or 4 includes a base member 10 made from a dielectric such as resin or ceramic, a ground electrode 11 formed on the first major surface of the base member 10, a meander-shaped emission electrode 12 having a length about one-fourth the wavelength at the resonant frequency, formed on the second major surface of the base member 10, and a power-feeding electrode 13 extending from the first major surface of the base member 10 to the second major surface through one end face. One end of the emission electrode 12 serves as an open end 12a, which is disposed so as to oppose the power-feeding electrode 13 through a gap 14, and the other end serves as a ground end 12b, which is connected to the ground electrode 11 through one end face of the base member 10.

[0031] In the surface-mount antenna 3 or 4, which is configured as described above, when a signal is input to the power-feeding electrode 13, the signal is trans-

ferred from the power-feeding electrode 13 to the emission electrode 12 through the gap 14. Since the emission electrode 12 forms a  $\lambda/4$  stub having a ground end and an open end, it resonates according to the input signal. Then, an electric field is generated between the emission electrode 12 and the ground electrode 11, and a part of the energy thereof leaks out and is emitted as a radio wave. The wave has linear polarization in which the direction of the electric field matches the longitudinal direction of the base member 10 and is emitted in directions substantially perpendicular to the longitudinal direction of the base member 10.

[0032] Referring back to Fig. 1, in the circular-polarization antenna 1 configured as described above, the two surface-mount antennas 3 and 4 are disposed such that the longitudinal directions of their base members are perpendicular to each other in order that their planes of polarization (planes formed by the direction of the electric field and the direction the wave proceeds) of the emitted waves are perpendicular to each other in the direction normal to the mounting substrate 2. On the other hand, signals transferred from the two surface-mount antennas 3 and 4 to the amplification circuit have a phase shift of 90 degrees caused by the phase circuit 6. As a result, the circular-polarization antenna 1 operates as an antenna handling circularly polarized waves.

[0033] With this structure of the circular-polarization antenna 1, since the shield case 5 covering the amplification circuit, the surface-mount antennas 3 and 4 and the phase circuit 6 are mounted on only the second major surface of the mounting substrate 2, the mounting cost for the components is reduced, and a low-profile antenna is implemented. In addition, when the phase circuit 6 is formed of a capacitive element and an inductive element such that the absolute values of their impedances match those of the output impedances of the surface-mount antennas 3 and 4, signals having the same amplitude and a phase difference of 90 degrees are sent to the surface-mount antennas 3 and 4, and matching is achieved from the amplification circuit to the surface-mount antennas 3 and 4.

[0034] Since the emission electrodes 12 of the two surface-mount antennas 3 and 4 are set to have lengths of about  $\lambda/4$  in the circular-polarization antenna 1 shown in Fig. 1, high-frequency currents flowing through the emission electrodes 12 become highest at the ground ends 12b. The highest high-frequency currents indicate that generated magnetic fields also become strongest there. Since the ground ends 12b are formed perpendicular to major surfaces of the base members 10 on the end faces of the base members 10, namely perpendicular to the mounting substrate 2, in the two surface-mount antennas 3 and 4, the magnetic fields generated by the high-frequency currents flowing near the ground ends 12b are parallel to the mounting substrate 2. Therefore, if the ground ends 12b of the two surface-mount antennas 3 and 4, or the ground ends 12b and the power-feeding electrodes 13, which are formed on

the same end faces of the base members 10 as the ground ends 12b, are closely disposed, they interfere with each other and the antenna characteristics, especially the axial ratio of circular polarization, deteriorate.

[0035] In the circular-polarization antenna 1, the two-surface antennas 3 and 4 are arranged such that the open ends 12a of the emission electrodes 12 are disposed close to each other in order that the ground ends 12b are farthest away from each other. With this positioning, the two surface-mount antennas 3 and 4 have reduced mutual interference and the deterioration of the antenna characteristics of the circular-polarization antenna 1 is prevented.

[0036] Fig. 3 shows the structure of another surface-mount antenna used in a circular-polarization antenna according to the present invention. In Fig. 3, the surface-mount antenna 90 includes a base member 91 made from a dielectric such as resin or ceramic, a ground electrode 92 formed on the first major surface of the base member 91, an emission electrode 93 having a length on the second major surface of the base member 91 about one-fourth the wavelength at the resonant frequency, and a power-feeding electrode 94. One end of the emission electrode 93 extends to one end face and serves as an open end 93a, and the other end branches into three ground ends 93b, 93c, and 93d, which are connected to the ground electrode 92 through different end faces of the base member 91. The power-feeding electrode 94 is formed such that its one end opposes the open end 93a of the emission electrode 93 through a gap 95 on one end face of the base member 91, and the other end extends to the first major surface of the base member 91.

[0037] In the surface-mount antenna 90, which is configured as described above, when a signal is input to the power-feeding electrode 94, the signal is transferred from the power-feeding electrode 94 to the emission electrode 93 through the gap 95. Since the emission electrode 93 forms a  $\lambda/4$  stub having an open end and a ground end, it resonates according to the input signal. Then, an electric field is generated between the emission electrode 93 and the ground electrode 92, and a part of the energy thereof leaks out and is emitted as a radio wave. The wave has linear polarization in which the direction of the electric field matches the longitudinal direction of the base member 91 and is emitted in directions substantially perpendicular to the longitudinal direction of the base member 91.

[0038] In the surface-mount antenna 90, one end of the emission electrode 93 branches into the three ground ends 93b, 93c, and 93d, which are connected to the ground electrode 92 through different end faces. This point will be described next.

[0039] If the surface-mount antenna 90 has only the ground end 93b as the other end of the emission electrode 93 without having the ground ends 93c and 93d, all currents flowing into the other end of the emission electrode 93 gather at the ground end 93b. Fig. 4 shows

the amount of the currents flowing into the ground end 93b when only the ground end 93b serves as the other end of the emission electrode 93. In Fig. 4, the same symbols as those used in Fig. 3 are assigned to the same portions or the equivalent portions. As shown in Fig. 4, currents J flowing through the ground end 93b gather at the portion close to the open end 93a in the ground end 93b due to their electromagnetic characteristics. Therefore, the current density at the ground end 93b becomes very large, and the antenna gain is reduced due to conductor loss at the end. To solve this problem, it can be considered that the width of the ground end 93b is extended. Also in this case, since the characteristics in which the flowing currents gather at the portion close to the open end 93a does not change, the substantial length of the emission electrode 93 is reduced because the open end 93a becomes close to the ground end 93b, and the resonant frequency becomes high. Just this drawback is produced. The conductor loss cannot be reduced.

**[0040]** When the ground end of the emission electrode 93 is divided into three ends 93b, 93c, and 93d, however, since the flowing currents disperse, the amount of currents flowing through each ground end is reduced. Since the current density at one ground end decreases, the conductor loss is reduced and the antenna gain is increased.

**[0041]** In the surface-mount antenna 90 shown in Fig. 3, the ground end is divided into three portions. When the antenna is configured such that the ground end 93d is omitted and the end is divided into only two ground ends 93b and 93c formed on two end faces opposing each other, for example, the same advantages may be obtained.

**[0042]** With an antenna to be installed outdoors such as a GPS antenna among the circular-polarization antennas, the entire antenna is covered by a radome to protect the antenna element. Fig. 5 is a cross section illustrating an electric field emitted from the emission electrode 12 of a surface-mount antenna 3 or 4 in a case when the circular-polarization antenna 1 is covered by a radome. In Fig. 5, there is shown a radome 8.

**[0043]** As shown in Fig. 5, since the length of the emission electrode 12 in the surface-mount antenna 3 or 4 is set to about  $\lambda/4$ , an electric field E1 emitted from the emission electrode 12 of the surface-mount antenna 3 or 4 becomes strongest at the open end 12a of the emission electrode 12. Because the open end 12a is formed close to the end of the second major surface of the base member 10, and the radome 8, which is a dielectric having a certain dielectric constant, covers the surface-mount antenna 3 or 4 just over it to make a low-profile circular-polarization antenna, a part of the electric field E1, which essentially proceeds toward the ground electrode 11, emitted from the open end 12a is drawn by the radome 8 and reaches a portion away from the end of the base member 10.

**[0044]** A condition in which the electric fields E1 emit-

ted from the emission electrodes 12 reach portions away from the ends of the surface-mount antennas 3 and 4 means that a possibility in which the two surface-mount antennas 3 and 4 interfere with each other by their electric fields E1 increases. This deteriorates the antenna characteristics.

**[0045]** Fig. 6 shows another embodiment of the present invention. Fig. 6 illustrates a case in which deterioration of the antenna characteristics due to an electric field emitted from the open end of an emission electrode is prevented. The same symbols as those used in Figs. 1 and 2 are assigned to the same portions or the equivalent portions in Fig. 6, and the descriptions thereof will be omitted.

**[0046]** In Fig. 6, the open ends 12a of the emission electrodes 12 of two surface-mount antennas 3x and 4x constituting a circular-polarization antenna 9 are formed at positions inward from the ends of the base members 10 at a certain distance "d."

**[0047]** Fig. 7 is a cross section illustrating an electric field emitted from the emission electrode 12 of the surface-mount antenna 3x or 4x in the circular-polarization antenna 9. Since the open end 12a of the emission electrode 12 in the surface-mount antenna 3x or 4x is formed at a position inward from the end of the second major surface of the base member 10 by a certain distance "d," most of an electric field E2 emitted from the open end 12a proceeds to the ground electrode 11 and a part of the electric field E2 drawn by the radome 8 does not reach far from the end of the base member 10. As a result, the mutual interference between the two surface-mount antennas 3 and 4 is reduced, and deterioration of the antenna characteristics of the circular-polarization antenna 9 is prevented. In addition, since the antenna characteristics of the circular-polarization antenna 9 is unlikely to be affected by the radome 8, the height of the radome 8 can be further reduced and a low-profile circular-polarization antenna can be made.

**[0048]** Fig. 8 shows still another embodiment of the present invention. Fig. 8 illustrates a case in which the mutual interference of two surface-mount antennas is prevented. The same symbols as those used in Fig. 1 are assigned to the same portions or the equivalent portions in Fig. 8, and the descriptions thereof will be omitted.

**[0049]** In Fig. 8, a shield plate 16 insulating from a phase circuit 6 is provided above the phase circuit 6 between two surface-mount antennas 3 and 4 disposed on a mounting substrate 2 in a circular-polarization antenna 15 at a portion where the antennas are disposed close. The shield plate 16 is made from a conductor such as a metal, and its end is insulated from the mounting substrate 2 and secured, and is also grounded. Since the shield plate 16 is provided between the two surface-mount antennas 3 and 4 at a portion where the antennas are disposed close, a magnetic field and an electric field emitted from portions close to each other of the two surface-mount antennas are shielded. With this, the mutual

interference between the two surface-mount antennas 3 and 4 is prevented, and deterioration of the antenna characteristics of the circular-polarization antenna 15 is prevented. In the same way as for the circular-polarization antenna 9 shown in Fig. 6, since the mutual interference between the two surface-mount antennas does not increase even if a radome is provided, the height of the radome can be reduced and a low-profile circular-polarization antenna 15 can be made.

[0050] Fig. 9 shows the structure of still another surface-mount antenna used for a circular-polarization antenna according to the present invention. In Fig. 9, the surface-mount antenna 20 includes a base member 21 made from a dielectric such as resin or ceramic, a ground electrode 22 formed from one end face of the base member 21 to the first major surface, an emission electrode 23 formed in a U shape with two right angles at the bottom on the second major surface of the base member 21, a power-feeding electrode 24 extending from the first major surface of the base member 21 to the second major surface through one end face, and a ground electrode 25 formed from the first major surface of the electrode 21 to the second major surface through one end face. One end of the emission electrode 23 is connected to the ground electrode 22, and the other end serves as an open end. One end of the ground electrode 25 is disposed such that it opposes the open end of the emission electrode 23 through a gap 26. Corresponding to the open end of the emission electrode 23, the power-feeding electrode 24 is disposed close to the ground electrode 22 at the open-end side of the emission electrode 23.

[0051] In the surface-mount antenna 20 configured as described above, when a signal is input to the power-feeding electrode 24, the signal is transferred from the power-feeding electrode 24 to the emission electrode 23 through a capacitor 27 formed between the power-feeding electrode 24 and the open end of the emission electrode 23. One end of the emission electrode 23 is connected to the ground electrode 22, and the other end serves as an open end. By the capacitance between the open end and the ground electrode 25, and the inductance of the emission electrode itself, the emission electrode 23 operates as an LC resonant circuit. An electric field is generated between the emission electrode 23 and the ground electrode 25, a part of the energy thereof leaks out, and it is emitted as a radio wave.

[0052] Fig. 10 shows the structure of yet another surface-mount antenna used for a circular-polarization antenna according to the present invention. In Fig. 10, the surface-mount antenna 30 includes a base member 31 made from a dielectric such as resin or ceramic, a power-feeding electrode 32 and ground electrodes 33 at both sides thereof, formed on one end face of the base member 31, an emission electrode 34 formed on the opposing end face, and a through hole 35 for connecting the power-feeding electrode 32 to the emission electrode 34 between the opposing two end faces.

[0053] The surface-mount antenna 30 configured as described above operates as a monopole antenna in which one end is open due to the power-feeding electrode 32, the through hole 35, and the emission electrode 34. Since the operation of a monopole antenna is well known, the description thereof is omitted.

[0054] The surface-mount antennas shown in Fig. 9 and Fig. 10 are for linear polarization. A circular-polarization antenna formed of such antenna implements the same operations and advantages as those in the embodiment shown in Fig. 1.

[0055] In the surface-mount antennas shown in the embodiments illustrated in Fig. 2 to Fig. 9, the emission electrodes have a meander shape and a U shape with two right angles at the bottom. The electrodes may have other shapes such as a straight or L shape. The base members of the surface-mount antennas in the embodiments illustrated in Figs. 2 to 10 are made from a dielectric. They may be made from a magnetic material.

[0056] Fig. 11 shows a circular-polarization antenna according to yet another embodiment of the present invention. The same symbols as those used in Fig. 1 are assigned to the same portions or the equivalent portions in Fig. 11, and the descriptions thereof will be omitted.

[0057] In Fig. 11, a phase circuit 41 of a circular-polarization antenna 40 has a surface-mount capacitor 41a at a portion connected to a surface-mount antenna 3 and an inductance formed of a microstrip line 41b at a portion connected to a surface-mount antenna 4. The surface-mount capacitor 41a and the microstrip line 41b serve as a capacitive element showing a capacitive function and an inductive element showing an inductive function, respectively. Their capacitance, length, and width are determined such that signals applied to the surface-mount antennas 3 and 4 have a phase shift of 90 degrees and their impedances match the output impedances of the surface-mount antennas 3 and 4.

[0058] Fig. 12 shows a circular-polarization antenna according to a further embodiment of the present invention. The same symbols as those used in Fig. 1 are assigned to the same portions or the equivalent portions in Fig. 12, and the descriptions thereof will be omitted.

[0059] In Fig. 12, a phase circuit 51 of a circular-polarization antenna 50 has a surface-mount capacitor 51a at a portion connected to a surface-mount antenna 3 and an air-core inductor 51b at a portion connected to a surface-mount antenna 4. The surface-mount capacitor 51a and the air-core inductor 51b serve as a capacitive element showing a capacitive function and an inductive element showing an inductive function, respectively. Their capacitance and inductance are determined such that signals applied to the surface-mount antennas 3 and 4 have a phase shift of 90 degrees and their impedances match the output impedances of the surface-mount antennas 3 and 4.

[0060] Fig. 13 shows a circular-polarization antenna according to a still further embodiment of the present invention. The same symbols as those used in Fig. 1

are assigned to the same portions or the equivalent portions in Fig. 13, and the descriptions thereof will be omitted.

[0061] In Fig. 13, a phase circuit 61 of a circular-polarization antenna 60 has an interdigital capacitor 61a formed on a mounting substrate 2, at a portion connected to a surface-mount antenna 3 and an inductance formed of a microstrip line 61b at a portion connected to a surface-mount antenna 4. The interdigital capacitor 61a and the microstrip line 61b serve as a capacitive element showing a capacitive function and an inductive element showing an inductive function, respectively. Their capacitance, length and width are determined such that signals applied to the surface-mount antennas 3 and 4 have a phase shift of 90 degrees and their impedances match the output impedances of the surface-mount antennas 3 and 4.

[0062] Fig. 14 shows a circular-polarization antenna according to a yet further embodiment of the present invention. The same symbols as those used in Fig. 1 are assigned to the same portions or the equivalent portions in Fig. 14, and the descriptions thereof will be omitted.

[0063] In Fig. 14, a phase circuit 71 of a circular-polarization antenna 70 has a surface-mount capacitor 71a at a portion connected to a surface-mount antenna 3 and a surface-mount inductor 71b at a portion connected to a surface-mount antenna 4. The surface-mount capacitor 71a and the surface-mount inductor 71b serve as a capacitive element showing a capacitive function and an inductive element showing an inductive function, respectively. Their capacitance and inductance are determined such that signals applied to the surface-mount antennas 3 and 4 have a phase shift of 90 degrees and their impedances match the output impedances of the surface-mount antennas 3 and 4.

[0064] Fig. 15 shows a circular-polarization antenna according to a yet still further embodiment of the present invention. The same symbols as those used in Fig. 1 are assigned to the same portions or the equivalent portions in Fig. 15, and the descriptions thereof will be omitted.

[0065] In Fig. 15, a phase circuit 81 of a circular-polarization antenna 80 has a flat-plane capacitor 81a formed by electrodes formed at the upper side and inside of a multilayer mounting substrate 2, at a portion connected to a surface-mount antenna 3 and a microstrip line 81b at a portion connected to a surface-mount antenna 4. The flat-plane capacitor 81a and the microstrip line 81b serve as a capacitive element showing a capacitive function and an inductive element showing an inductive function, respectively. Their capacitance, inductance length, and width are determined such that signals applied to the surface-mount antennas 3 and 4 have a phase shift of 90 degrees and their impedances match the output impedances of the surface-mount antennas 3 and 4.

[0066] As described above, since a capacitor and an inductor are used for the capacitive element and the in-

ductive element of the phase circuit, the circular-polarization antennas 40, 50, 60, 70, and 80 of the present invention achieve the same operations and advantages as in the embodiment shown in Fig. 1. With the use of chip components as the capacitive element and the inductive element, the area required for forming the phase circuit can be reduced to make the circular-polarization antenna compact. In addition, because the capacitance and the inductance can be easily changed due to the use of chip components, the mounting substrate 2 can be flexibly used for circular-polarization antennas with different frequencies.

[0067] Fig. 16 shows a configuration of a navigation-system as an embodiment of a radio apparatus using the circular-polarization antenna of the present invention.

[0068] In the Fig. 16, a radio apparatus 110 comprises an antenna 111 comprising the circular-polarization antenna of the present invention housed in a case with a radome, a receiving section 112 connected to the antenna 111, a signal-processing section 113 connected to the receiving section 112, a mapping system 114, a display 115 and an interface section 116 respectively connected to the signal-processing section 113. The antenna 111 receives electric waves from a plurality of GPS satellites and various kind of signals are picked up from the electric waves in the receiving section 112. In the signal-processing section 113, the present position of the radio apparatus itself i.e., an automobile equipped with the radio apparatus, is calculated from the received signals. A map and the present position is displayed on the display 115 with a help of the interface section 116 having the mapping system 114 comprising map software in the form of CD-ROM and a remote-control etc.

[0069] By configuring the navigation system which is one of radio apparatus using the circular-polarization antenna of the present invention as described above, miniaturization and cost reduction of the radio apparatus itself, and large-flexibility of placement by miniaturization are achieved. Thereby, a cost reduction of setting up the navigation system in an automobile can be achieved, for example.

[0070] In the radio apparatus 110, the circular-polarization antenna 1 is used. The same effect can be obtained when the circular-polarization antenna 9, 15, 40, 50, 60, 70, 80 shown in Figs. 6, 8, and 11-15.

## Claims

1. A circular-polarization antenna (1; 9; 15; 40; 50; 60; 70; 80) comprising:
  - a mounting substrate (2);
  - a pair of linear-polarization surface-mount antennas (3, 4; 3x, 4x; 20, 30) mounted on said mounting substrate each having a plane of po-

larization, the surface-mount antennas disposed such that the respective planes of polarization in a direction normal to the mounting surface of said mounting substrate are substantially perpendicular to each other;

a phase-circuit (6) connected to said pair of linear-polarization surface-mount antennas for at least one of sending thereto and receiving therefrom signals having the same amplitude and a phase difference of 90 degrees to each other;

an amplification circuit connected to said phase circuit (6);

#### characterized by

a shield case (5) covering said amplification circuit; wherein said pair of linear-polarization surface-mount antennas (3, 4; 3x, 4x; 20, 30), said phase circuit (6), said amplification circuit and said shield case (5) are mounted on the same mounting surface of said mounting substrate (2).

2. The circular-polarization antenna of Claim 1, further comprising a radome (8) covering said surface-mount antennas (3, 4; 20, 30), said phase circuit (6), said shield case (5) and said mounting substrate (2).
3. The circular-polarization antenna of Claim 1 or 2 wherein each of the surface-mount antennas (3, 4; 20, 30) has at least a power-feeding electrode (13; 24; 32), an emission electrode (12; 23; 34) and a ground electrode (11; 22; 33) provided on at least one of a surface of and inside of a substantially parallelepiped-rectangular base member (10; 21; 31) made of at least one of a dielectric material and a magnetic material.
4. The circular-polarization antenna of Claim 3, wherein each of said surface-mount antennas (3, 4) is formed such that said ground electrode (11) is provided substantially on a first major surface of said base member (10), said emission electrode (12) is formed substantially on a second major surface of the base member (10) with one end serving as an open and the other end serving as a ground end connected to said ground electrode (11), and one end of said power-feeding electrode (13) is formed in the vicinity of the open end of said emission electrode (12).
5. The circular-polarization antenna of Claim 4, wherein the other end of said emission electrode (12) of each of the surface-mount antennas (3, 4) is divided into a plurality of ends, and the ends are connected to the ground electrode (11) through dif-

ferent end faces of said base member (10) and serve as ground ends.

6. The circular-polarization antenna of Claim 4 or 5, wherein said pair of surface-mount antennas (3, 4) are disposed such that the respective ground ends thereof are farthest away from each other.
7. The circular-polarization antenna of any of the Claims 4 to 6, wherein the open end of said emission electrode (12) in each of said surface-mount antennas (3, 4) is formed inward from an end of the second major surface of said base member (10) at a predetermined distance on the second major surface of the base member (10).
8. The circular-polarization antenna (15) of Claim 1, further comprising a shield plate (16) provided between said pair of surface-mount antennas (3, 4).
9. The circular-polarization antenna of any of the preceding claims, wherein said phase circuit (6) comprises at least one of a capacitive element and an inductive (6a, 6b; 41a, 41b; 51a, 51b; 61a, 61b; 71a, 71b) element connected to said pair of surface-mount antennas (3, 4; 3x, 4x; 20, 30).
10. A radio apparatus (110), comprising:
  - a circular-polarization antenna (1; 9; 15; 40; 50; 60; 70; 80) of any one of Claims 1 to 9; and
  - a receiving section (112) and a signal-processing section (113) connected in series to said circular-polarization antenna.
11. A method of at least one of transmitting and receiving radio signals, comprising the steps of:
  - providing a circular-polarization antenna, of any one of the Claims 1 to 9;
  - connecting the circular-polarization antenna to a radio apparatus; and
  - at least one of:
    - receiving radio signals with the antenna and providing them to the radio apparatus; and
    - transmitting radio signals from the antenna provided to the antenna from the radio apparatus.

#### Patentansprüche

1. Eine Zirkularpolarisationsantenne (1; 9; 15; 40; 50; 60; 70; 80), die folgende Merkmale aufweist:

ein Befestigungssubstrat (2);

ein Paar aus Linearpolarisations-Oberflächenbefestigungsantennen (3, 4; 3x, 4x; 20, 30), die an dem Befestigungssubstrat befestigt sind und jeweils eine Polarisationssebene aufweisen, wobei die Oberflächenbefestigungsantennen derart angeordnet sind, dass die jeweiligen Polarisationssebenen in einer Richtung senkrecht zu der Befestigungsoberfläche des Befestigungssubstrats im Wesentlichen senkrecht zueinander sind;

eine Phasenschaltung (6), die mit dem Paar aus Linearpolarisations-Oberflächenbefestigungsantennen zumindest entweder zum Senden von Signalen zu denselben oder Empfangen von denselben verbunden ist, die dieselbe Amplitude und Phasendifferenz von 90° zueinander aufweisen;

eine Verstärkungsschaltung, die mit der Phasenschaltung (6) verbunden ist;

#### gekennzeichnet durch

ein Abschirmgehäuse (5), das die Verstärkungsschaltung abdeckt;

wobei das Paar aus Linearpolarisations-Oberflächenbefestigungsantennen (3, 4; 3x, 4x; 20, 30), die Phasenschaltung (6), die Verstärkungsschaltung und das Abschirmgehäuse (5) an derselben Befestigungsoberfläche des Befestigungssubstrats (2) befestigt sind.

2. Die Zirkularpolarisationsantenne gemäß Anspruch 1, die ferner eine Radarkuppel (8) aufweist, die die Oberflächenbefestigungsantenne (3, 4; 20, 30), die Phasenschaltung (6), das Abschirmgehäuse (5) und das Befestigungssubstrat (2) abdeckt.
3. Die Zirkularpolarisationsantenne gemäß Anspruch 1 oder 2, bei der jede der Oberflächenbefestigungsantennen (3, 4; 20, 30) zumindest eine Leistungszuführelektrode (13; 24; 32), eine Emissionselektrode (12; 23; 34) und eine Masseelektrode (11; 22; 33) aufweist, die zumindest entweder an einer Oberfläche von oder an einer Innenseite von einem im Wesentlichen parallelepipedrechteckigen Basisbauglied (10; 21; 31) vorgesehen sind, hergestellt zumindest entweder aus einem dielektrischen Material oder einem magnetischen Material.
4. Die Zirkularpolarisationsantenne gemäß Anspruch 3, bei der jede der Oberflächenbefestigungsantennen (3, 4) derart gebildet ist, dass die Masseelektrode (11) im Wesentlichen auf einer ersten Hauptoberfläche des Basisbauglieds (10) vorgesehen ist, die Emissionselektrode (12) im Wesentlichen auf

einer zweiten Hauptoberfläche des Basisbauglieds (10) gebildet ist, wobei ein Ende als ein Leerlaufende dient und das andere Ende als ein Masseende dient, das mit der Masseelektrode (11) verbunden ist, und wobei ein Ende der Leistungszuführelektrode (13) in der Nähe des Leerlaufendes der Emissionselektrode (12) gebildet ist.

5. Die Zirkularpolarisationsantenne gemäß Anspruch 4, bei der das andere Ende der Emissionselektrode (12) von jeder der Oberflächenbefestigungsantennen (3, 4) in eine Mehrzahl von Enden unterteilt ist und die Enden mit der Masseelektrode (11) durch unterschiedliche Endflächen des Basisbauglieds (10) verbunden sind und als Masseenden dienen.
6. Die Zirkularpolarisationsantenne gemäß Anspruch 4 oder 5, bei der das Paar aus Oberflächenbefestigungsantennen (3, 4) derart angeordnet ist, dass die jeweiligen Masseenden derselben am weitesten entfernt voneinander sind.
7. Die Zirkularpolarisationsantenne gemäß einem der Ansprüche 4 bis 6, bei der das Leerlaufende der Emissionselektrode (12) bei jeder der Oberflächenbefestigungsantennen (3, 4) einwärts von einem Ende der zweiten Hauptoberfläche des Basisbauglieds (10) in einer vorbestimmten Distanz auf der zweiten Hauptoberfläche des Basisbauglieds (10) gebildet ist.
8. Die Zirkularpolarisationsantenne (15) gemäß Anspruch 1, die ferner eine Abschirmplatte (16) aufweist, die zwischen dem Paar aus Oberflächenbefestigungsantennen (3, 4) vorgesehen ist.
9. Die Zirkularpolarisationsantenne gemäß einem der vorangehenden Ansprüche, bei der die Phasenschaltung (6) zumindest entweder ein kapazitives Element oder ein induktives (6a, 6b; 41a, 41b; 51a, 51b; 61a, 61b; 71a, 71b) Element aufweist, das mit dem Paar aus Oberflächenbefestigungsantennen (3, 4; 3x, 4x; 20, 30) verbunden ist.
10. Eine Funkvorrichtung (110), die folgende Merkmale aufweist:
  - eine Zirkularpolarisationsantenne (1; 9; 15; 40; 50; 60; 70; 80) gemäß einem der Ansprüche 1 bis 9; und
  - einen Empfangsabschnitt (112) und einen Signalverarbeitungsabschnitt (113), die in Reihe mit der Zirkularpolarisationsantenne geschaltet sind.
11. Ein Verfahren zumindest entweder zum Senden oder Empfangen von Funksignalen, das folgende Schritte aufweist:

Bereitstellen einer Zirkularpolarisationsantenne gemäß einem der Ansprüche 1 bis 9;

Verbinden der Zirkularpolarisationsantenne mit einer Funkvorrichtung; und

zumindest entweder:

Empfangen von Funksignalen mit der Antenne und Liefern derselben zu der Funkvorrichtung; und

Senden der Funksignale von der Antenne, die zu der Antenne von der Funkvorrichtung geliefert werden.

## Revendications

1. Antenne de polarisation circulaire (1 ; 9 ; 15 ; 40 ; 50 ; 60 ; 70 ; 80) comprenant :

un substrat de montage (2) ;  
une paire d'antennes à montage en surface de polarisation linéaire (3, 4 ; 3x, 4x ; 20, 30) qui sont montées sur ledit substrat de montage, chacune présentant un plan de polarisation, les antennes à montage en surface étant disposées de telle sorte que les plans de polarisation respectifs suivant une direction qui est normale à la surface de montage dudit substrat de montage soient sensiblement perpendiculaires l'un à l'autre ;  
un circuit de phase (6) qui est connecté à ladite paire d'antennes à montage en surface de polarisation linéaire pour au moins une action prise parmi l'envoi dessus et la réception depuis de signaux présentant la même amplitude et une différence de phase de 90° l'un par rapport à l'autre ;  
un circuit d'amplification qui est connecté audit circuit de phase (6),

**caractérisée par :**

un boîtier de blindage (5) qui recouvre ledit circuit d'amplification,

dans laquelle ladite paire d'antennes à montage en surface de polarisation linéaire (3, 4 ; 3x, 4x ; 20, 30), ledit circuit de phase (6), ledit circuit d'amplification et ledit boîtier de blindage (5) sont montés sur la même surface de montage dudit substrat de montage (2).

2. Antenne de polarisation circulaire selon la revendication 1, comprenant en outre un radôme (8) qui recouvre lesdites antennes à montage en surface

(3, 4 ; 20, 30), ledit circuit de phase (6), ledit boîtier de blindage (5) et ledit substrat de montage (2).

3. Antenne de polarisation circulaire selon la revendication 1 ou 2, dans laquelle chacune des antennes à montage en surface (3, 4 ; 20, 30) comporte au moins une électrode d'alimentation (13 ; 24 ; 32), une électrode d'émission (12 ; 23 ; 34) et une électrode de masse (11 ; 22 ; 33) comme prévu sur au moins une partie prise parmi une surface et un intérieur d'un élément de base présentant sensiblement la forme d'un parallélépipède rectangle (10 ; 21 ; 31) qui est réalisé en au moins un élément pris parmi un matériau diélectrique et un matériau magnétique.

4. Antenne de polarisation circulaire selon la revendication 3, dans laquelle chacune desdites antennes à montage en surface (3, 4) est formée de telle sorte que ladite électrode de masse (11) soit prévue sensiblement sur une première surface principale dudit élément de base (10), que ladite électrode d'émission (12) soit formée sensiblement sur une seconde surface principale de l'élément de base (10), qu'une extrémité jouant le rôle d'extrémité ouverte et que l'autre extrémité jouant le rôle d'extrémité de masse soient connectées à ladite électrode de masse (11), et qu'une extrémité de ladite électrode d'alimentation (13) soit formée au voisinage de l'extrémité ouverte de ladite électrode d'émission (12).

5. Antenne de polarisation circulaire selon la revendication 4, dans laquelle l'autre extrémité de ladite électrode d'émission (12) de chacune des antennes à montage en surface (3, 4) est divisée selon une pluralité d'extrémités et les extrémités sont connectées à l'électrode de masse (11) par l'intermédiaire de faces d'extrémité différentes dudit élément de base (10) et jouent le rôle d'extrémités de masse.

6. Antenne de polarisation circulaire selon la revendication 4 ou 5, dans lequel les antennes de ladite paire d'antennes à montage en surface (3, 4) sont disposées de telle sorte que leurs extrémités de masse respectives soient le plus éloigné les unes des autres.

7. Antenne de polarisation circulaire selon l'une quelconque des revendications 4 à 6, dans laquelle l'extrémité ouverte de ladite électrode d'émission (12) dans chacune desdites antennes à montage en surface (3, 4) est formée à l'intérieur par rapport à une extrémité de la seconde surface principale dudit élément de base (10) à une distance prédéterminée sur la seconde surface principale de l'élément de base (10).

8. Antenne de polarisation circulaire (15) selon la re-

vention 1, comprenant en outre une plaque de blindage (16) qui est prévue entre ladite paire d'antennes à montage en surface (3, 4).

9. Antenne de polarisation circulaire selon l'une quelconque des revendications précédentes, dans laquelle ledit circuit de phase (6) comprend au moins un élément pris parmi un élément capacitif et un élément inductif (6a, 6b ; 41a, 41 b ; 51 a, 51b ; 61a, 61 b ; 71a, 71 b) connecté à ladite paire d'antennes à montage en surface (3, 4 ; 3x, 4x ; 20, 30). 5 10

10. Appareil radio (110) comprenant :

une antenne de polarisation circulaire (1 ; 9 ; 15 ; 40 ; 50 ; 60 ; 70 ; 80) selon l'une quelconque des revendications 1 à 9 ; et  
une section de réception (112) et une section de traitement de signal (113) qui sont connectées en série à ladite antenne de polarisation circulaire. 15 20

11. Procédé soit d'émission, soit de réception de signaux radio, comprenant les étapes de :

fourniture d'une antenne de polarisation circulaire selon l'une quelconque des revendications 1 à 9 ;  
connexion de l'antenne de polarisation circulaire à un appareil radio ; et  
au moins une action prise parmi : 25 30

la réception de signaux radio à l'aide de l'antenne et leur application sur l'appareil radio ; et  
l'émission de signaux radio depuis l'antenne, lesquels signaux sont fournis à l'antenne depuis l'appareil radio. 35 40

40

45

50

55

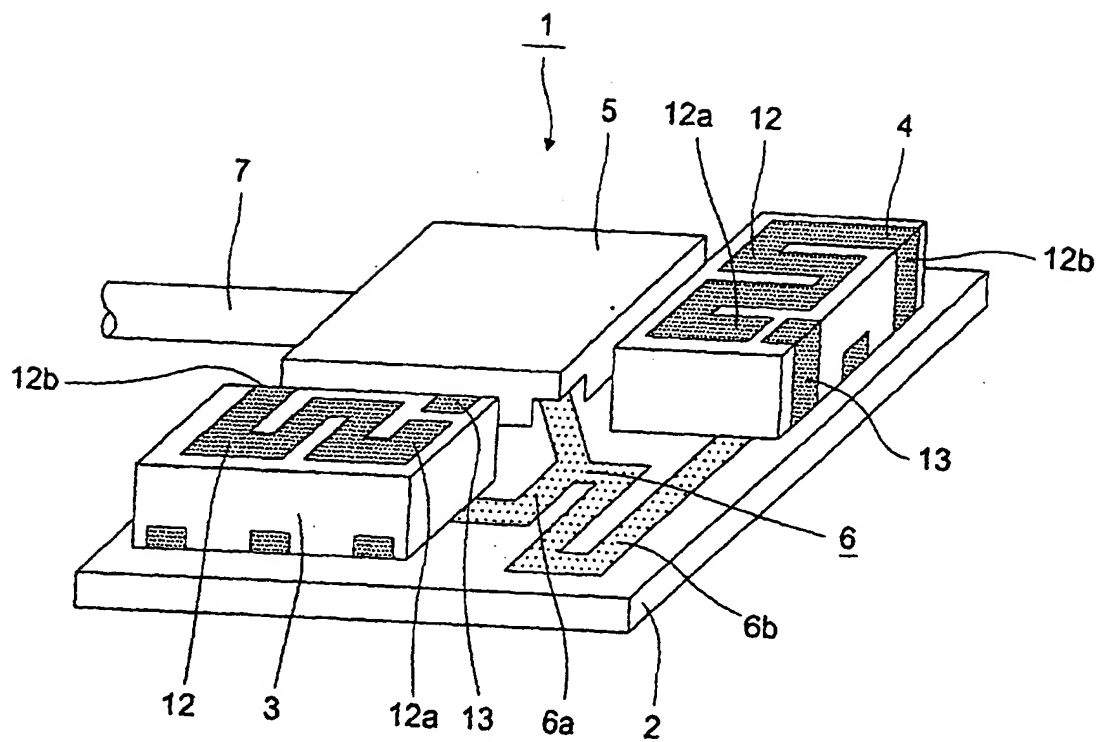


FIG.1

FIG.2

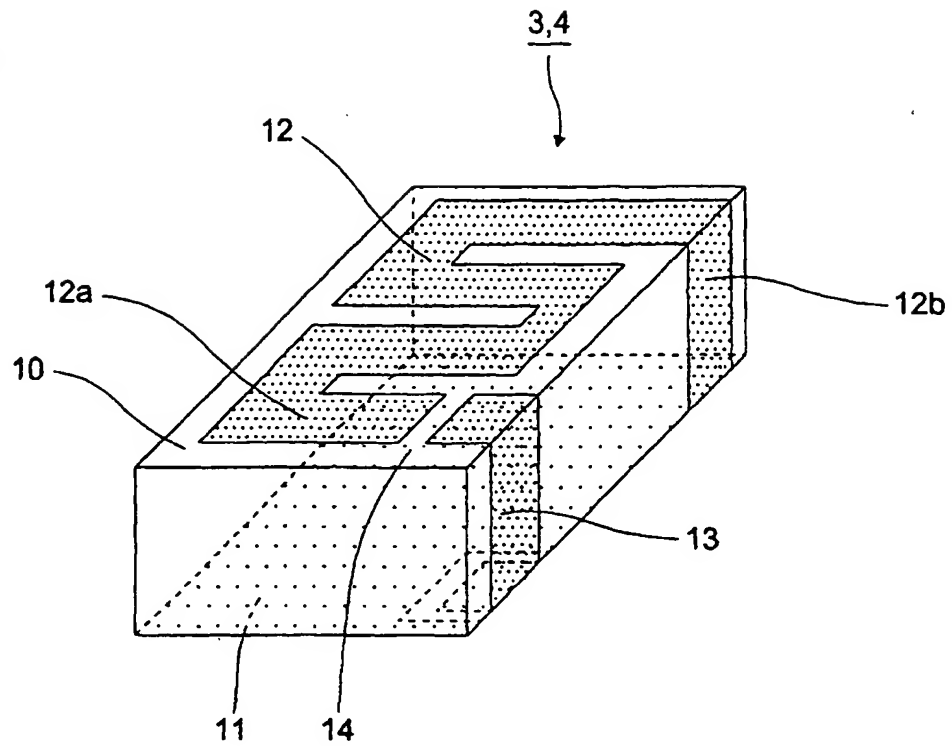


FIG.3

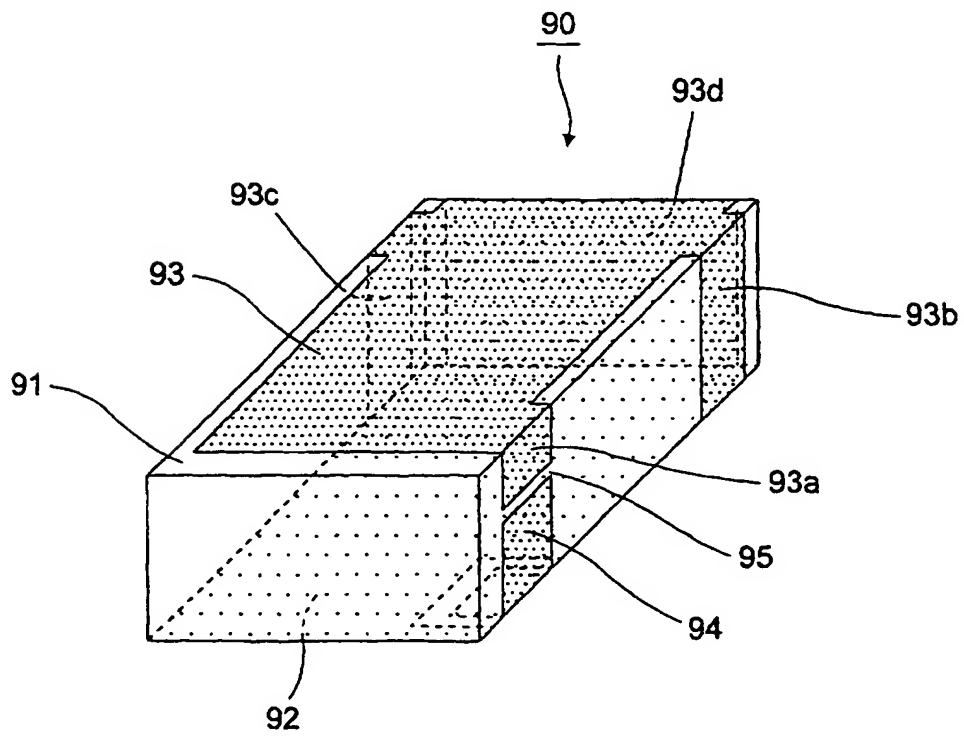


FIG.4

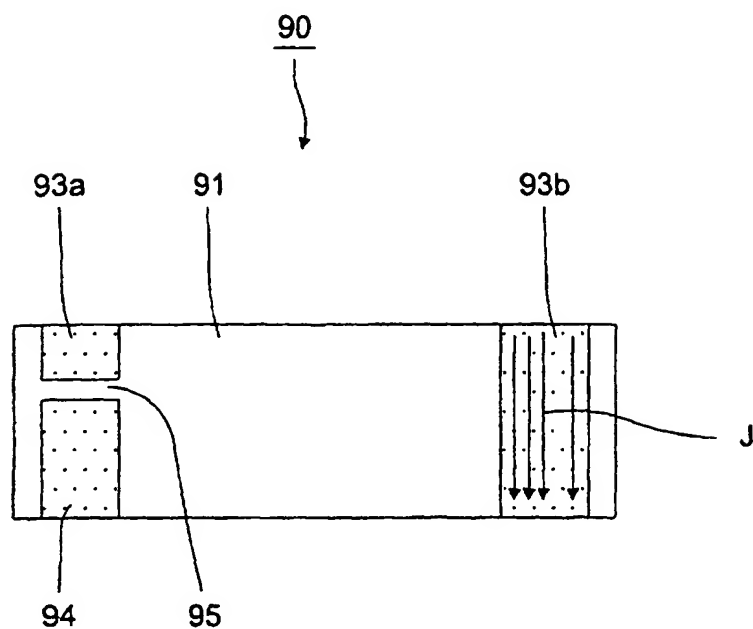
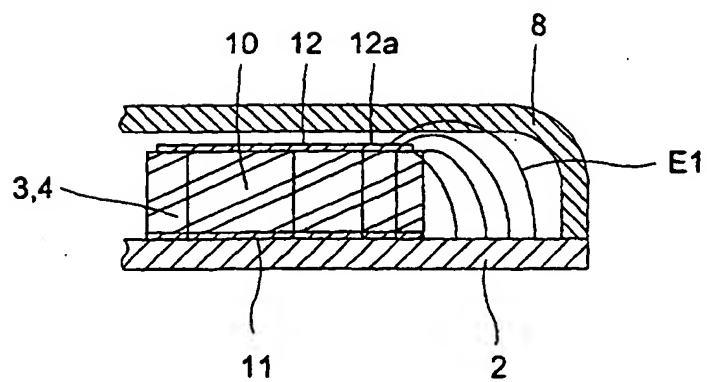


FIG.5



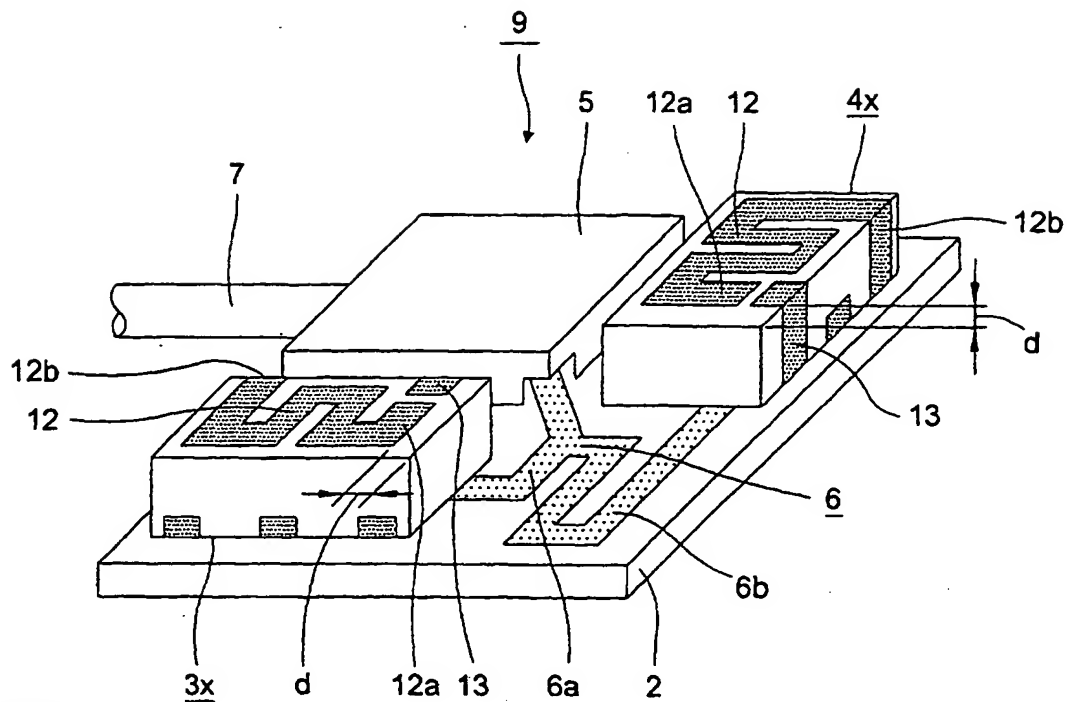


FIG. 6

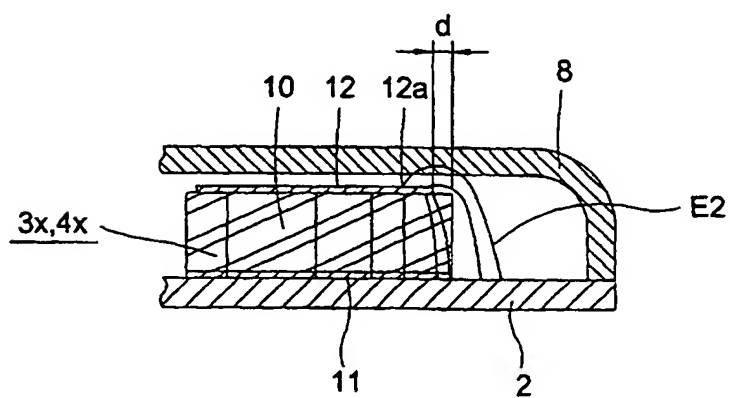


FIG. 7

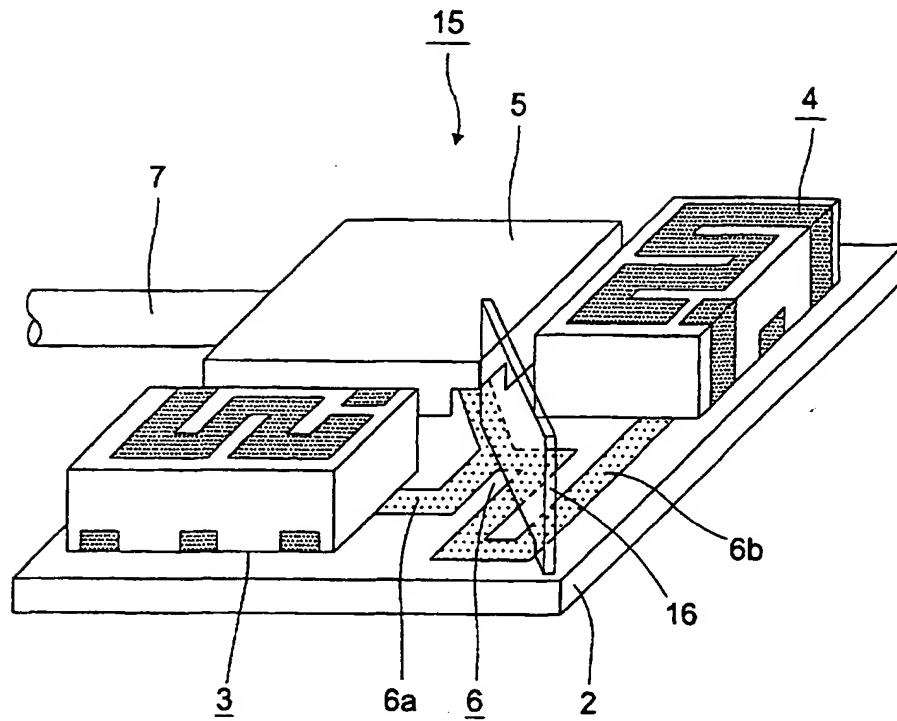


FIG. 8

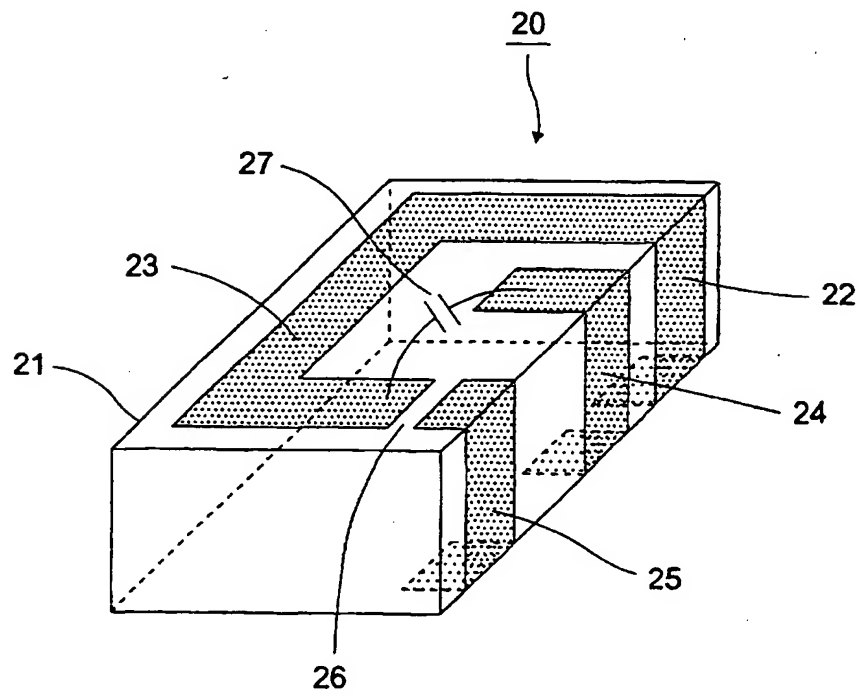


FIG. 9

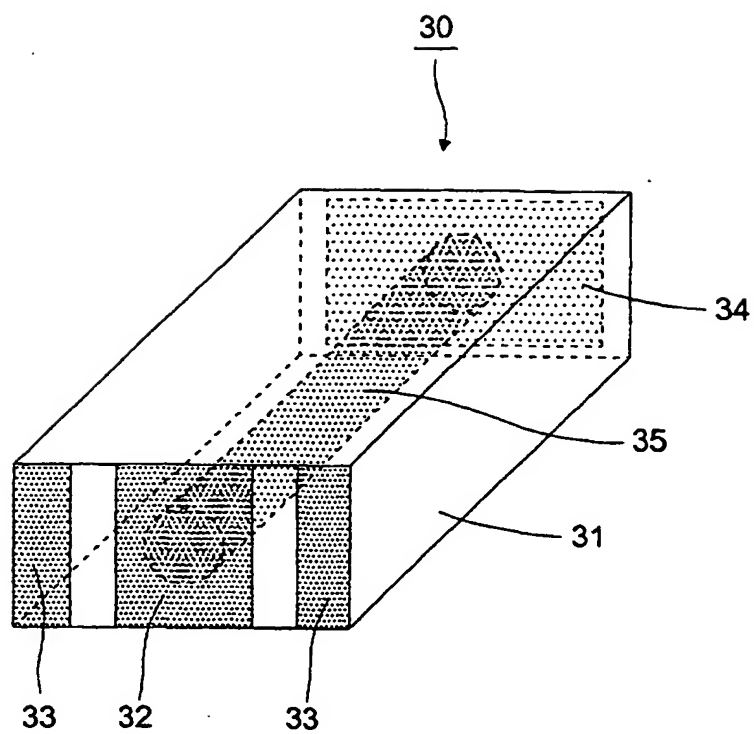


FIG. 10

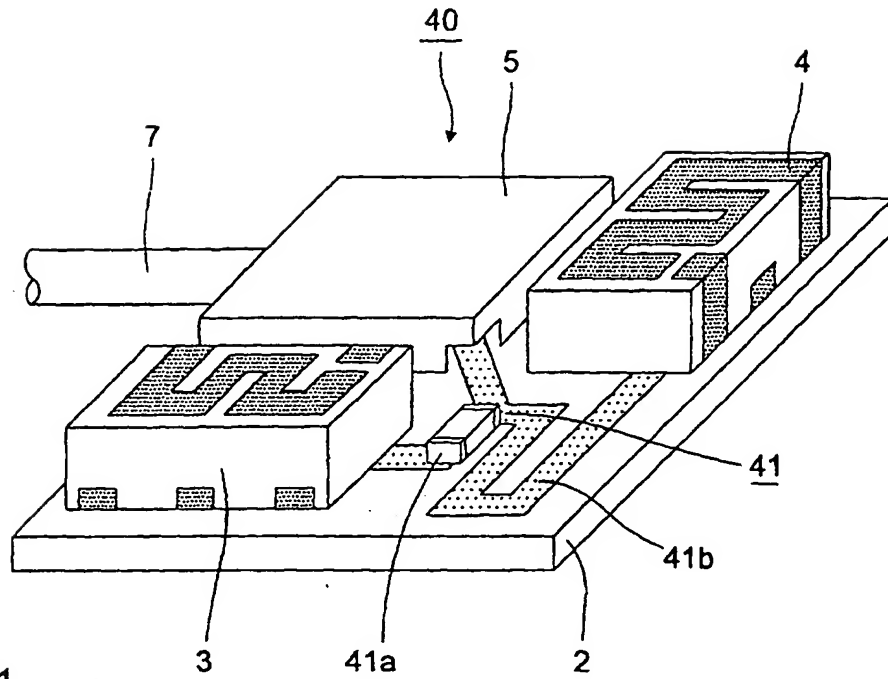


FIG.11

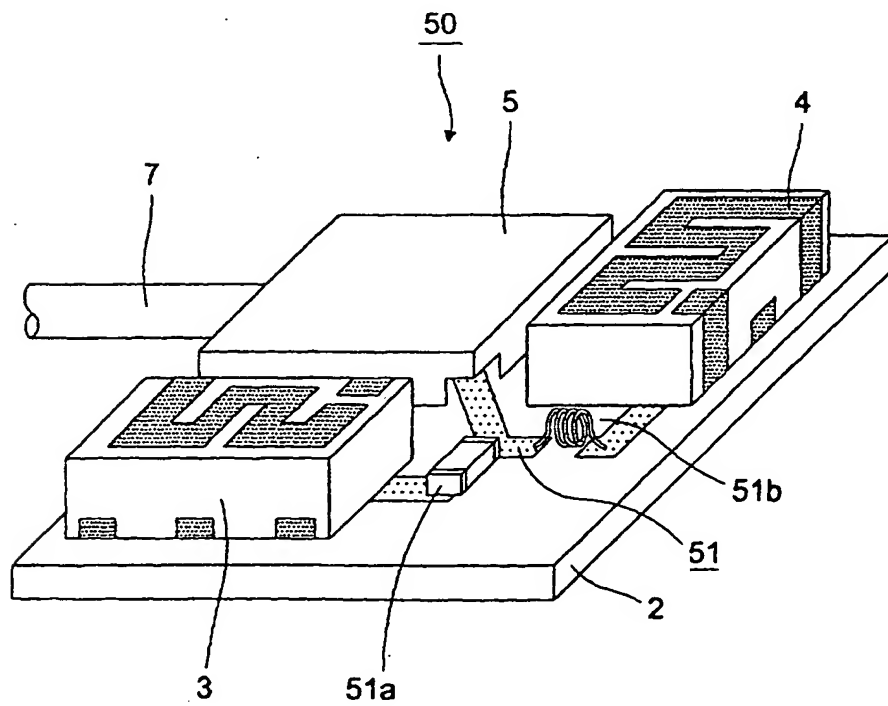


FIG.12

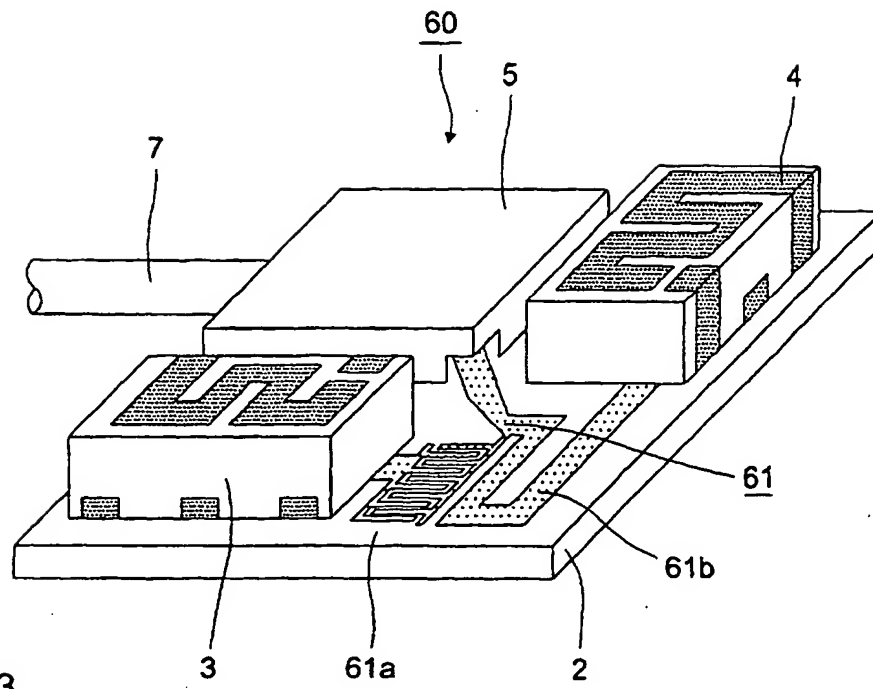


FIG. 13

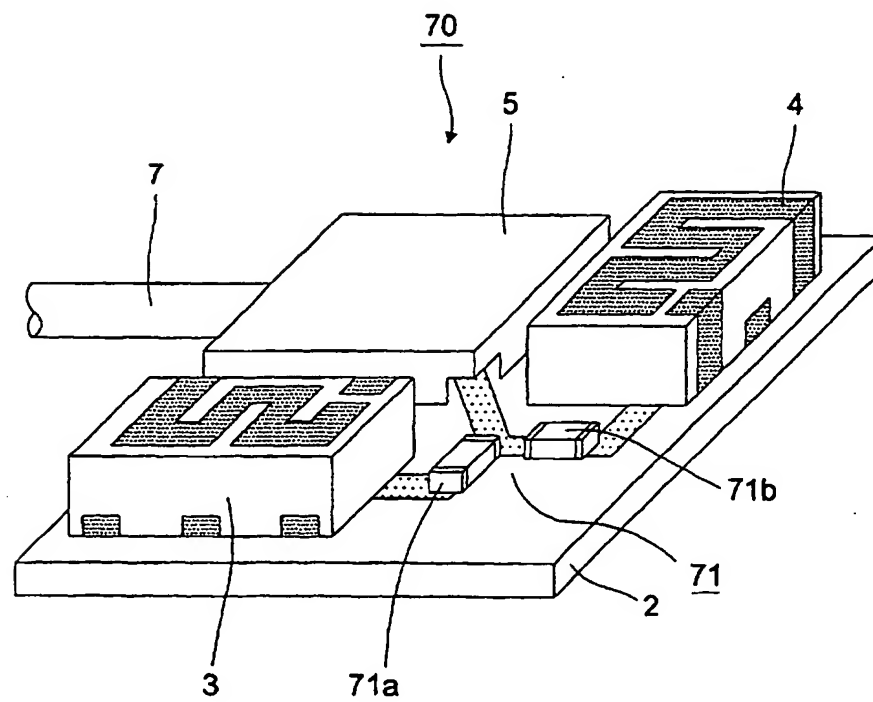


FIG. 14

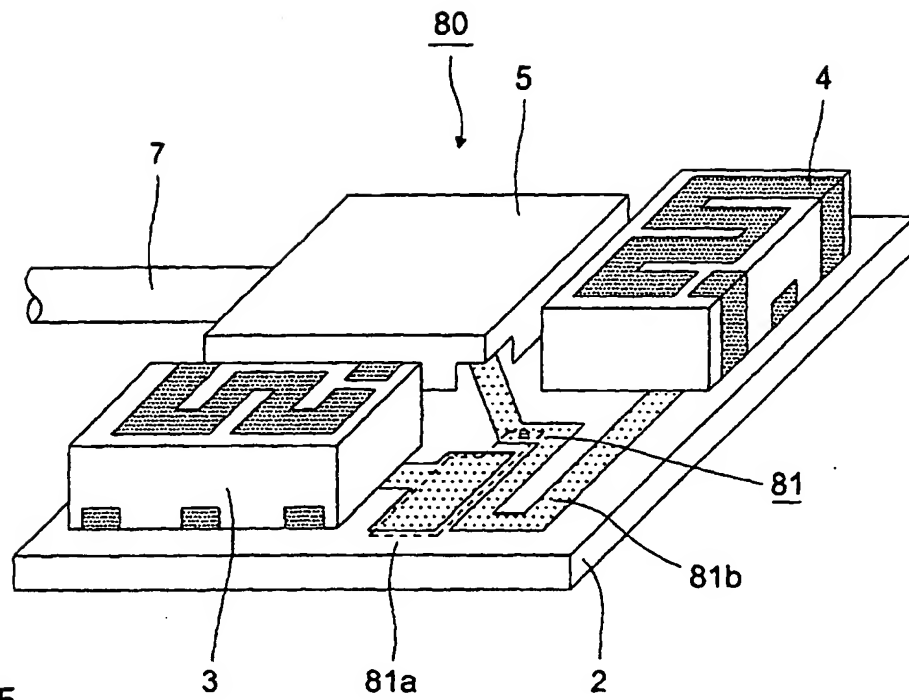


FIG.15

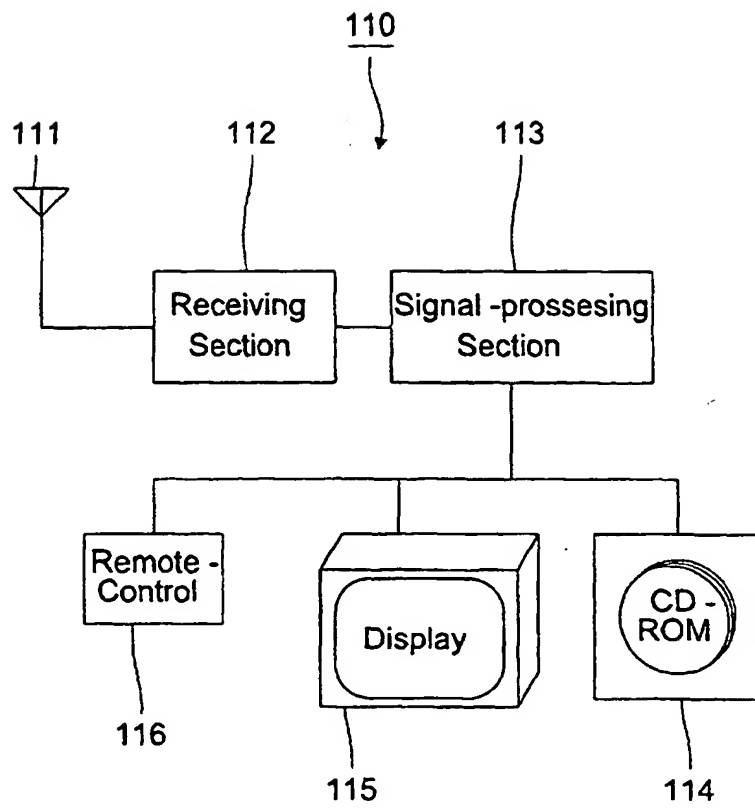


FIG.16

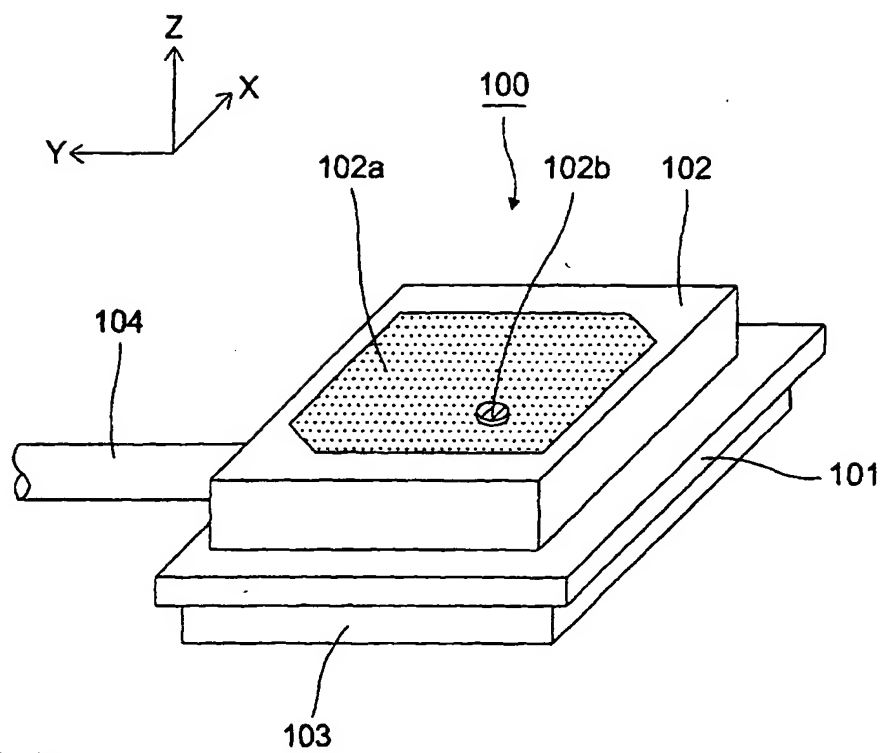


FIG.17

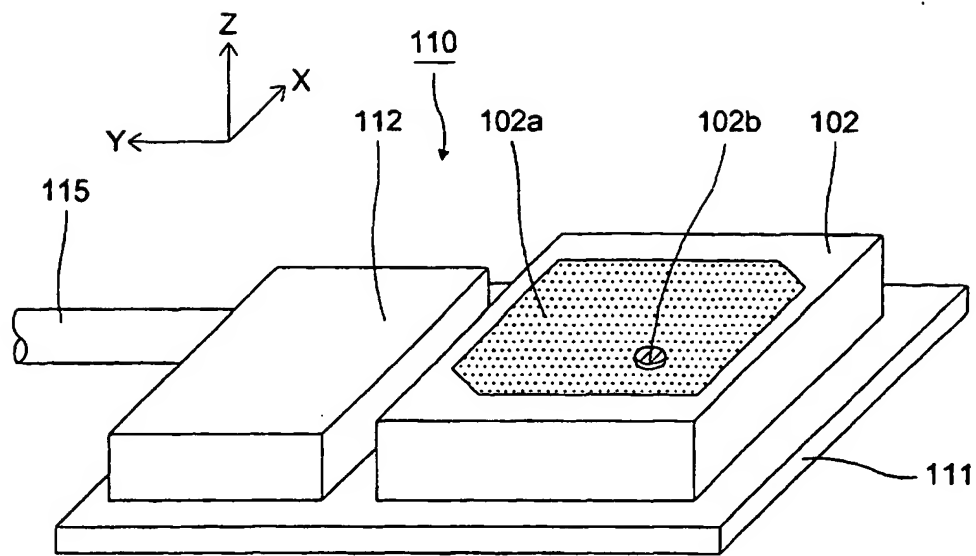


FIG.18A

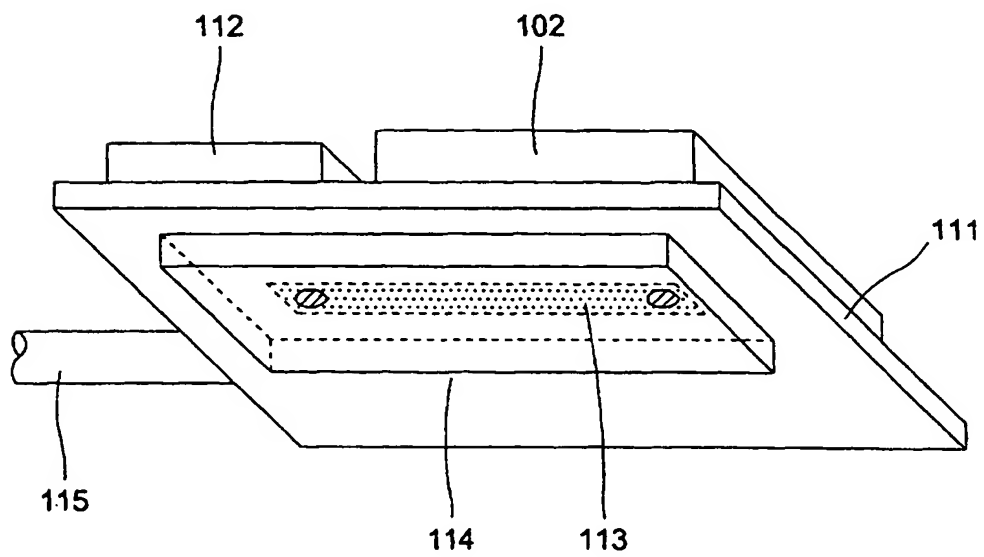


FIG.18B

This Page is inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record

## BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLORED OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REPERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images problems checked, please do not report the problems to the IFW Image Problem Mailbox**